

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 July 2004 (01.07.2004)


PCT

(10) International Publication Number  
WO 2004/054422 A1

- (51) International Patent Classification<sup>7</sup>: A47L 9/24 (74) Agent: INSIGHT INTELLECTUAL PROPERTY LIMITED; Suite 501 Zhongyang Building, No. 27A Zhongguancun Nandajie, Haidian District, Beijing 100081 (CN).
- (21) International Application Number: PCT/CN2003/000825
- (22) International Filing Date: 27 September 2003 (27.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
02292939.8 18 December 2002 (18.12.2002) CN  
03106916.9 27 February 2003 (27.02.2003) CN
- (71) Applicant and  
(72) Inventor: ZHANG, Yuqi [CN/CN]; Suite 306, No. 34 XibeiHuaxiang, Jingde Road, Suzhou, Jiangsu215003 (CN).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SUCTION TUBE FOR A VACUUM CLEANER

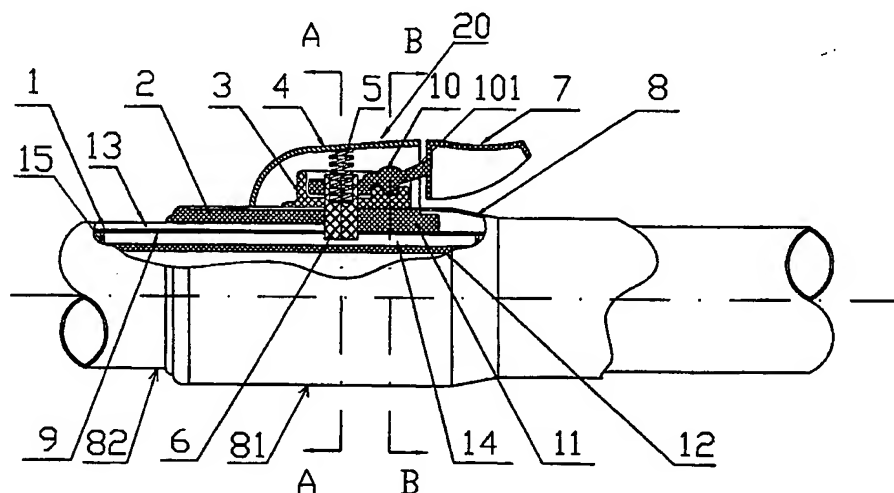

(57) Abstract: The present invention provides a suction tube for a vacuum cleaner, which comprises an outer pipe (8), an inner pipe (1) received in the outer pipe, and a locking device (20) disposed between the inner pipe (1) and the outer pipe (8). A guiding bush (2) is provided at the inner wall of the outer pipe (8). The inner pipe (1) is provided with a row of detent holes (9) which are arranged in the axial direction of the inner pipe (1). An inner liner tube (12) is fixed onto the inner wall of the inner pipe (1). Thus, the manufacturing of the detent recesses becomes easier since the detent holes are made through the inner wall of the inner pipe, and the air leakage of the inner pipe due to the detent holes can be prevented by the inner liner tube (12) provided at the inner pipe (1).

WO 2004/054422 A1